



# Asus Eee PC 1008ha Screen Replacement

Replace a cracked or malfunctioning screen on your Asus Eee PC 1008ha.

Written By: Michael Dooley



## INTRODUCTION

This guide will take you through the steps of replacing the screen.

---



### TOOLS:



- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery



- Using the Plastic Opening Tool, carefully pry the top panel from the base.


## Step 2

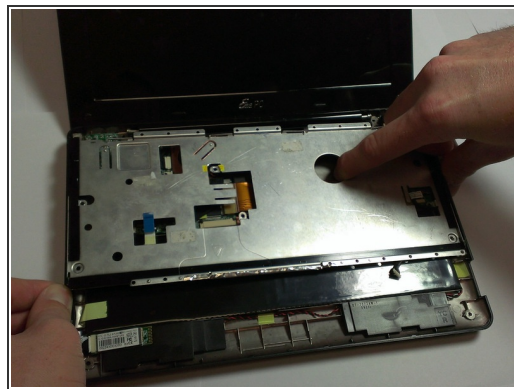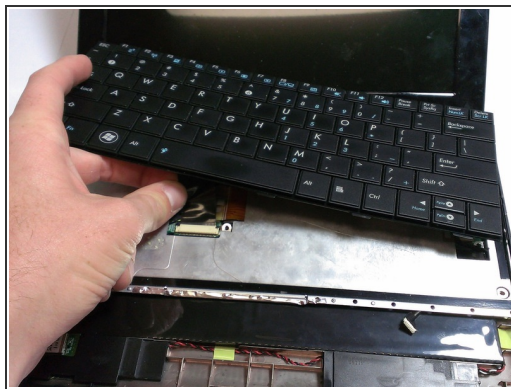

- Lift the side of the keyboard gently and disconnect the attached ribbon located underneath the keyboard.
- Place your index finger in the hole on the right side of the keyboard tray and lift the tray gently.




## Step 3

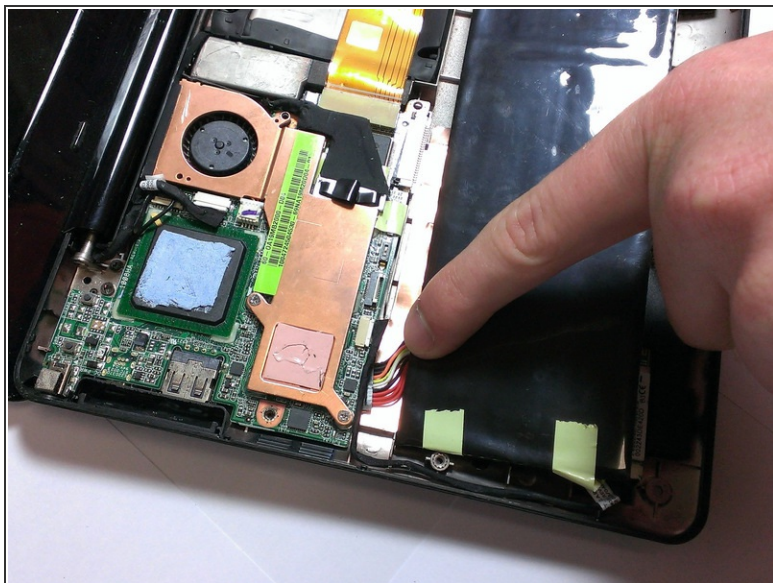

- Use your fingers to lift the battery and gently disconnect the wires from the base.

## Step 4 — LCD Screen

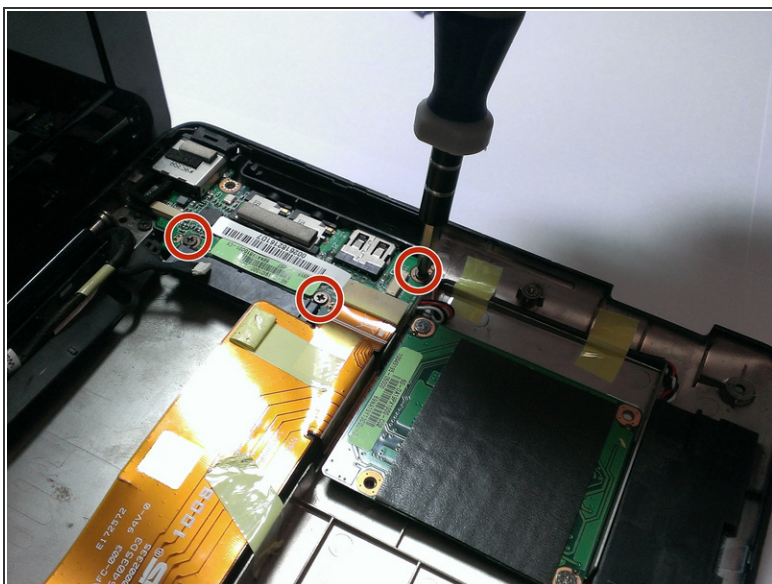

- Using the Phillips #00 screwdriver, unscrew the 4mm screws from the rightmost circuit board.
- Carefully pull the circuit board away from side of device base.



## Step 5



- Using the Phillips #00 screwdriver, unscrew the 4mm screws attaching screen to base from both sides.
- Gently lift the screen portion from the base.

## Step 6



- Using the Plastic Opening Tool, pry the six small chits from the face of the screen portion.
- Using the Phillips #00 screwdriver, unscrew the two 2mm and four 4mm screws from underneath the chits.

## Step 7



- Slide the Plastic Opening Tool under the edge of the screen bezel to release the front panel of the screen.

## Step 8



- Using the Phillips #00 screwdriver, unscrew the 2mm screws from the perimeter of the screen.
- Use your fingers to hold the screen and carefully lift it from the base.



## Step 9



- Use your fingers to peel back the adhesive tape located on the back of the screen.
- Disconnect the wire from the screen.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-08 03:25:25 AM.